


# TABLE BANDING MACHINE

## model TB 26

Banding of print products of all sorts

- » increased machine output (+ 20 %)
- » extended banding width to 260 mm
- » machine adjustments without any tool
- » maintenance-free

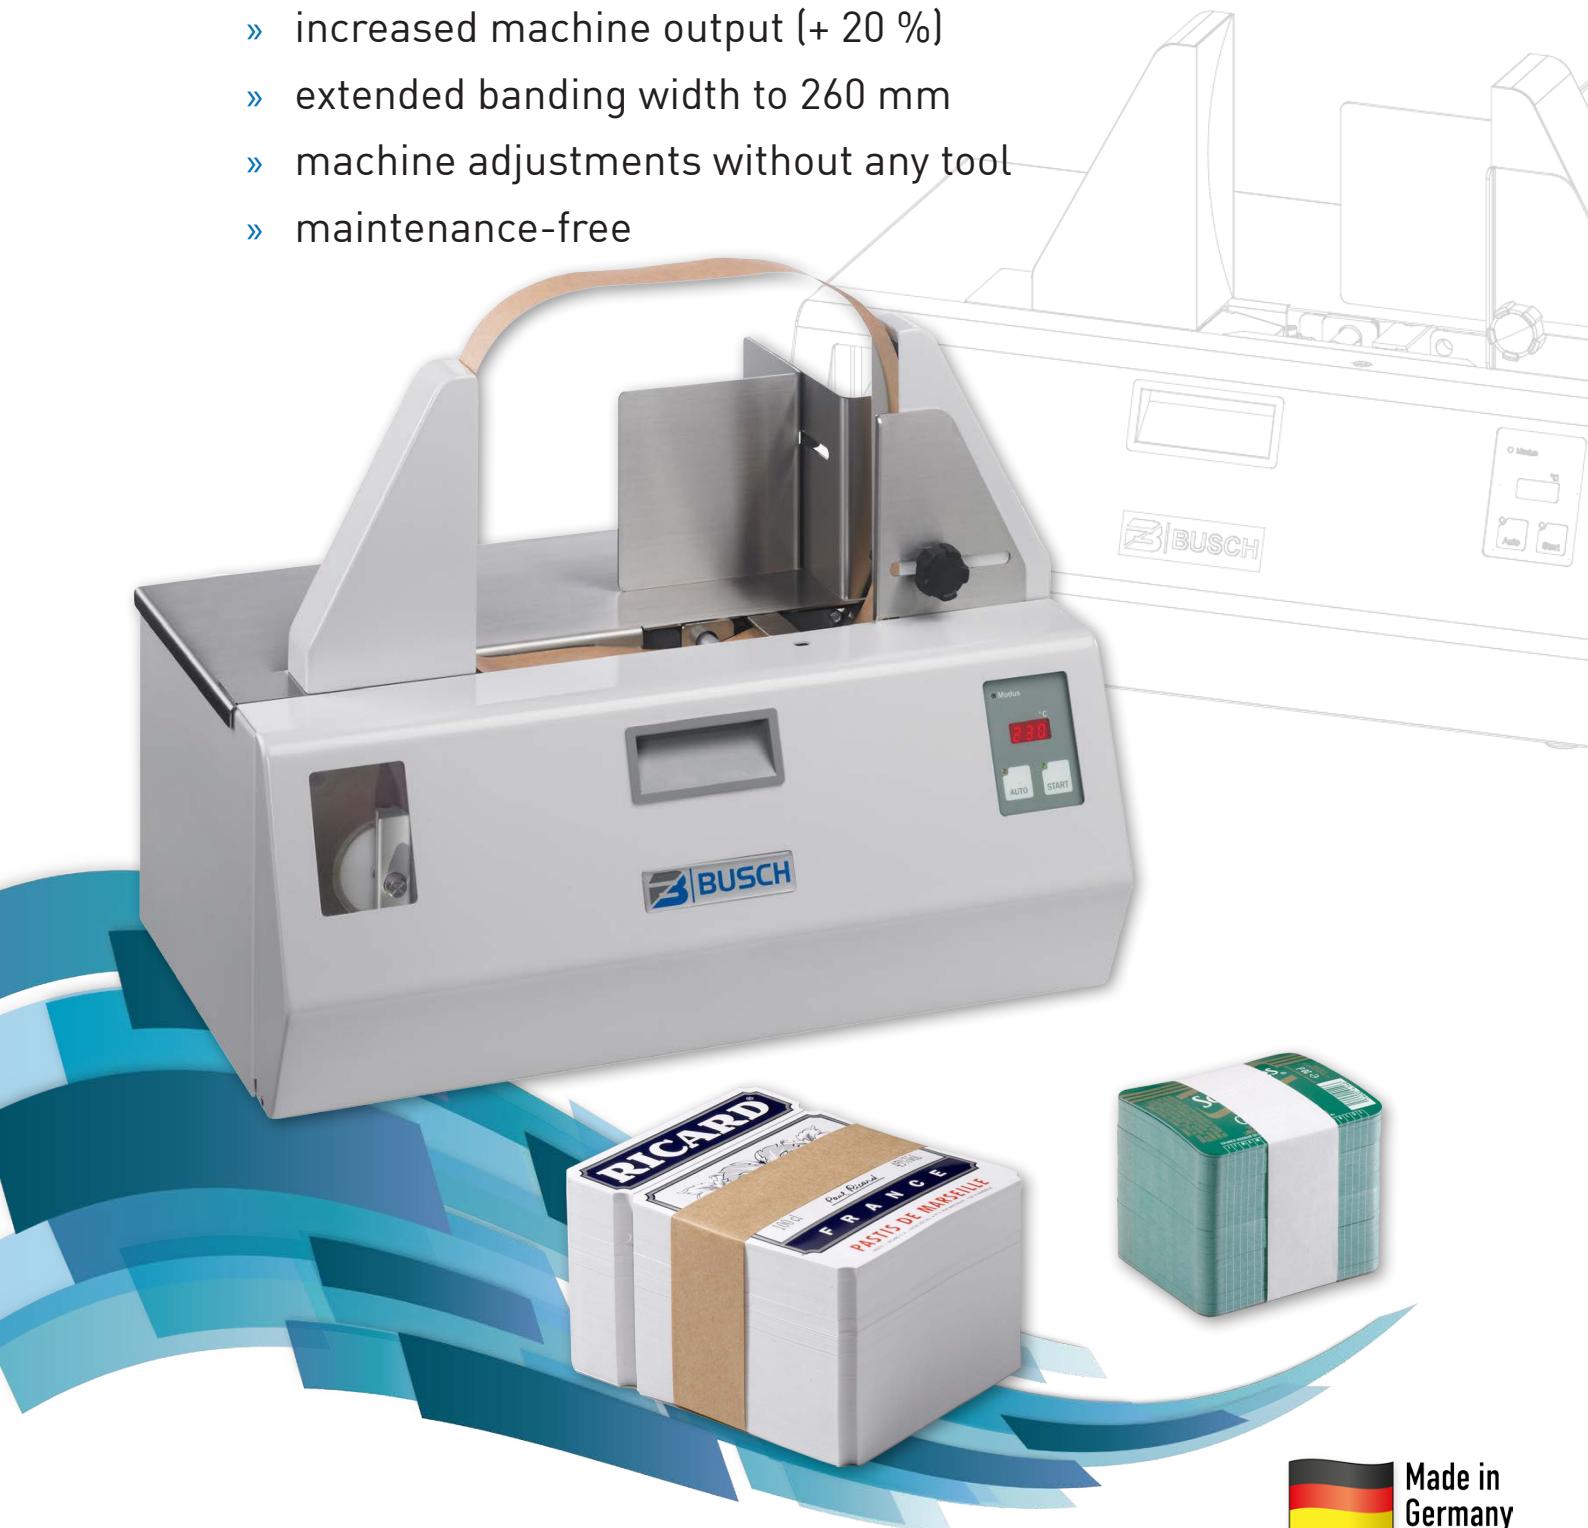

Made in  
Germany



## TABLE BANDING MACHINE

model TB 26

### Proven performance within the smallest space

- » highest reliability and multi-purpose use
- » very user friendly due to adjustable side and rear stops and easy tape reel exchange
- » electronic sealing temperature control guarantees constantly perfect banding results
- » loop size, tape tension and time delay for releasing the banding process in automatic mode are adjustable



### Activating the banding process :

- » single stroke activated by push-button
- » single stroke activated by foot pedal
- » automatic activation by sensor

### Option

Large Reel Stand GRS, mobile and height-adjustable

- » reduces the number of reel changes for high volume production
- » very flexible use because of 4 movable casters, two of which can be fixed
- » height-adjustable (663 - 932 mm) for an operator-friendly working height
- » only one electrical connection for banding machine and large reel stand

### Banding with large reels

- » Kraft paper tape (reel length : 800 m)
- » Polypropylene foil (reel length : 1000 m)





## Banding with BUSCH Banding Material

**Model TB 26 I**

for 20 and 30 mm tape width

**Model TB 26 II**

for 40 and 50 mm tape width



- » perfect banding results with high-class banding material from Gerhard Busch GmbH
- » banding with coated Kraft Paper Tape or transparent Polypropylene Foil Tape
- » made-up in Germany



		Kraft Paper Tape	Polypropylene (PP) Foil Tape
colour	brown white	transparent	
quality	70 g paper coated on one side with 23 g of Polyethylene (PE)	PP 100 µm (recommended due to higher loop stability)	PP 80 µm
reel length	approx. 150 m	approx. 150 m	approx. 200 m

### Small reels for insertion in Table Banding Machine

- » inner reel core diameter: 50 mm
- » outer diameter: approx. 160 mm






# TABLE BANDING MACHINE

## model TB 26

Technical data		TB 26 I	TB 26 II
Tape width		20 and 30 mm	40 and 50 mm
Machine output		25 - 30 strokes / min	23 - 28 strokes / min
Max. dimensions of products to be banded	length width height	unlimited 260 mm for banding with Kraft Paper Tape 220 mm for banding with Foil Tape (PP 100 µm)* 180 mm for banding with Foil Tape (PP 80 µm)**	170 mm
Machine dimensions	length width height	506 mm 323 mm 390 mm	
Weight	net / gross	25 / 28 kg	
Sound pressure level as per EN 13023 : 2003		max. 75 dB(A)	
Power requirements (A.C. single-phase)	230 V, 50 Hz 110 V, 60 Hz	160 Watt 160 Watt	
Power consumption	230 V, 50 Hz 110 V, 60 Hz	0,7 A 1,5 A	

\* recommended due to higher loop stability  
 \*\* possible, but lower loop stability

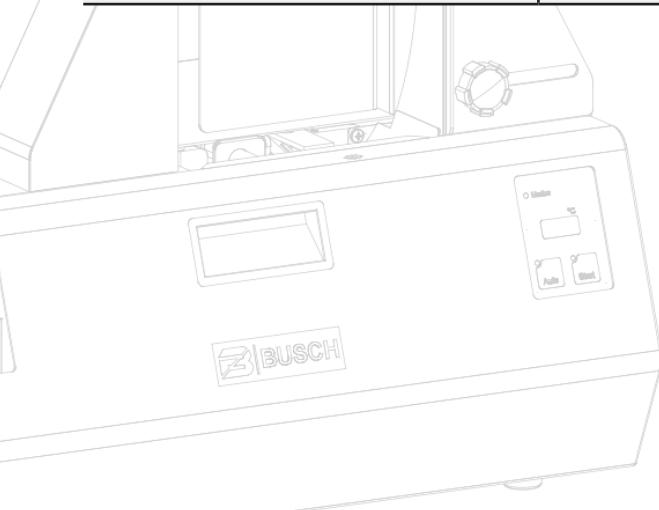

Gerhard Busch EBB GmbH  
 Brookdamm 28 | 21217 Seevetal | Germany  
 Tel. +49 (0)40 769 159-0  
 info@buschgraph.de | www.buschgraph.de

**Stapelwender** Pile Turners  
**Stanzmaschinen** Die-Cutting Machines  
**Bündelmaschinen** Banding Machines  
**Späneförderbänder** Waste Conveyors  
**Stapelheber** Pile Hoists  
**Bogenrüttler** Joggers